


HYDROLIFT HYDRAULIC BUFFERS - EN81-20/50 Compliant



Model	YH51-80 EN20/50	YH54-280 EN20/50	H55-435 EN20/50
Part Number	14.01.0000	14.01.0002	14.01.0003
Max strike load	3500 kg	4545 kg	4545 kg
Min strike load	600 kg	600 kg	600 kg
Max rated speed	1.0 m/s	2.03 m/s	2.54 m/s
Strike speed	1.15 m/s	2.34 m/s	2.92 m/s
Stroke	80 mm	280 mm	435 mm
Oil qty (included)	0.5 L	1.6 L	2.45 L
Overall Height	315 mm	775 mm	1125 mm

POLYURETHANE BUFFERS - EN81-20/50 Compliant

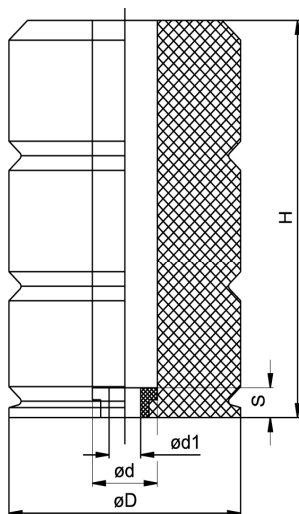

Model	D2 EN81-20	D5 EN81-20	D6 EN81-20
Part Number	14.02.0000	14.02.0001	14.02.0002
Diameter	100 mm	165 mm	220 mm
Height	80 mm	80 mm	80 mm
Compressed	72 mm	72 mm	72 mm
Nominal Speed 0.63 m/s Maximum Load	3200 kg	7500 kg	9400 kg
Nominal Speed 0.63 m/s Minimum Load	250 kg	600 kg	950 kg
Nominal Speed 1 m/s Maximum Load	1250 kg	2700 kg	5500 kg
Nominal Speed 1 m/s Minimum Load	330 kg	650 kg	1500 kg
D x H	100x80 mm	165x80 mm	220x80 mm
Ø d	35 mm	35 mm	35 mm
Ø d1	17 mm	17 mm	17 mm
S + 1.0	4 mm	6 mm	6 mm

ALL BUFFERS AVAILABLE FROM STOCK FOR NEXT DAY DELIVERY